




- Low power consumption
- Short cutting unit
- High brightness
- Long lifespan
- Small bending diameter
- Wide colour choice

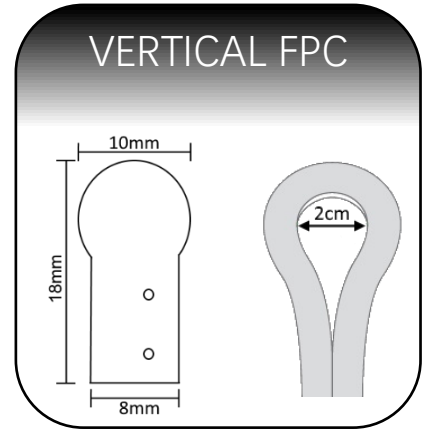

INPUT VOLTAGE	12V CONSTANT VOLTAGE	LED CHIPSET	EPISTAR 2835 SMD										
POWER CONSUMPTION	9W PER METER	LED COUNT	84 LEDs PER METER										
PHYSICAL DIMENSIONS	8 x 18 MM	LUMEN MAINTENANCE	L70 > 50,000 HOURS										
JACKET PROFILE	10MM HOLLOW DOME	COLOUR	SINGLE COLOUR										
MIN BEND DIAMETER	2CM	CRI	80RA										
VIEWING ANGLE	270°	CUTTING INTERVAL	3.6CM										
JACKET MATERIAL	PVC WITH UV INHIBITORS	BENDING DIRECTION	LEFT AND RIGHT										
FPC	VERTICAL, DOUBLE LAYER 2OZ COPPER	MAXIMUM RUNNING LENGTH	5M POWERED ONE END 10M POWERED BOTH ENDS										
WATER RESISTANCE	IP65 IF CORRECTLY SEALED	HOURS OF OPERATION	12 HOURS PER DAY										
HEAT MANAGEMENT	COOL TO THE TOUCH	DIMMABLE	YES VIA PWM										
WARRANTY	1 YEAR	OPERATING TEMP °C	-20° TO 35° CELSIUS										
ACCESSORIES	IP20 colour mini end cap, IP65 clear end cap, unwired mini pin, mini pin wire, wired mini pin, splicing pin, connector pin, L connector, I connector, butted cable connector, power cable connector (left & right), aluminium channel (5cm, 1m & 2m), heat shrink sleeve, 0-10V rotary wall dimmer, dimming remote, DMX decoder, DMX amplifier												
JACKET COLOURS	RED	BLUE	GREEN	PINK	LEMON YELLOW	AMBER YELLOW	ORANGE	WHITE					
LED COLOURS	RED	GREEN	BLUE	ICE BLUE	ORANGE	AMBER YELLOW	LEMON YELLOW	PINK	LIGHT PINK	PINK PURPLE	6000K	4000K	3000K